


Technical data sheet

Reducer, straight, from 120 mm to 80 mm duct height, FS

Item number: 7218102



Reducer with intumescent fire protection mesh for symmetrical reduction of straight duct sections from PLM D 1220 to PLM D 0810. Suitable for direct wall and ceiling mounting, mounting below system floors and on support systems. Tool-free joint mounting with PLM SI joint connector. The cover is snapped on without tools, allowing rapid inspection and retroassignment. The cover overhang allows offset cover mounting for continuous equipotential bonding of the entire duct section.

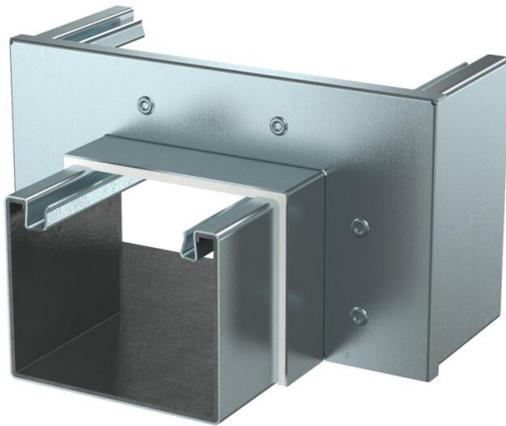

- St** Steel
- FS** Strip galvanized

Master data

Item number	7218102
Type	PLM RP 1220 FS
Description 1	Reducing piece
Description 2	with fire protection mesh
Manufacturer	OBO
Dimension	160x200x120
Colour	zinc
Material	Steel
Surface	Strip galvanized
Surface standard	DIN EN 10346
Smallest sales unit	1
Unit of quantity	Piece
Weight	63 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	4,5727 kg CO2e / 1 Piece


Technical data sheet

Reducer, straight, from 120 mm to 80 mm duct height, FS

Item number: 7218102



Dimensions

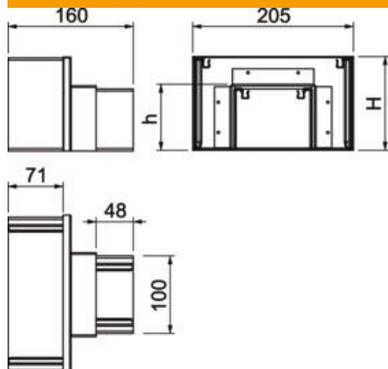

Dimension B	200 mm
Dimension h	80 mm
Dimension H	120 mm

Technical data

Number of flammable sides	4
Cover fastening	Miscellaneous
Jacketing	Steel