

# Technical data sheet

Underfloor duct, 2 pieces, 2-compartment, duct height 48 mm

Item number: 7400261



Underfloor trunking (2 piece) for routing cables in screed-covered underfloor systems, according to EN 50085-2-2. Removable and continuously lockable trunking cover. With separating retainers in the trunking base. Maximum load-bearing capacity to 1.5 kN.

The profiled side walls offer a locking mechanism to lock the duct cover onto the duct base. The stiffening beads in the duct cover serve to create stability.



**St** Steel

**FS** Strip galvanized

## Master data

Item number	7400261
Type	S2 19048-2
Description 1	Underfloor duct, 2-part
Description 2	2 compartments
Manufacturer	OBO
Dimension	2000x190x48
Material	Steel
Surface	Strip galvanized
Surface standard	DIN EN 10346
Smallest sales unit	2
Unit of quantity	Metre
Weight	347.997 kg
Weight unit	kg/100 m
CO2 Footprint (GWP) Cradle-to-Gate	7,6791 kg CO2e / 1 Meter


# Technical data sheet

Underfloor duct, 2 pieces, 2-compartment, duct height  
48 mm

Item number: 7400261



## Dimensions

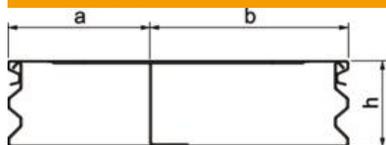

Length	2,000 mm
Width	190 mm
Height	48 mm
Dimension a	80 mm
Dimension b	110 mm
Dimension h	48 mm

## Technical data

Number of fixed partitions	1
Number of compartments	2 St.
Mounting system fastening type	Floor
Floor plate	yes
Application area	Screed-covered
Decouplable	no
Trunking width, min.	190 mm
Duct height, min.	48 mm
Usable cross-section	8217 mm <sup>2</sup>
Removable cover	yes
Cross-section, draw a	3413 mm <sup>2</sup>
Cross-section, draw b	4804 mm <sup>2</sup>
Vertical load, large area	to 1,500 N