

Technical data sheet

Underfloor duct, 2 pieces, 2-compartment, duct height 58 mm

Item number: 7400271



Underfloor trunking (2 piece) for routing cables in screed-covered underfloor systems, according to EN 50085-2-2. Removable and continuously lockable trunking cover. With separating retainers in the trunking base. Maximum load-bearing capacity to 1.5 kN. Only compatible with the UZD250-4/350-4. The profiled side walls offer a locking mechanism to lock the duct cover onto the duct base. The stiffening beads in the duct cover serve to create stability.



- St** Steel
- FS** Strip galvanized

Master data

Item number	7400271
Type	S2 25058-2
Description 1	Underfloor duct, 2-part
Description 2	2 compartments
Manufacturer	OBO
Dimension	2000x250x58
Material	Steel
Surface	Strip galvanized
Surface standard	DIN EN 10346
Smallest sales unit	2
Unit of quantity	Metre
Weight	433.453 kg
Weight unit	kg/100 m
CO2 Footprint (GWP) Cradle-to-Gate	9,5718 kg CO2e / 1 Meter


Technical data sheet

Underfloor duct, 2 pieces, 2-compartment, duct height
58 mm

Item number: 7400271



Dimensions

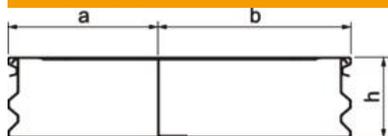

Length	2,000 mm
Width	250 mm
Height	58 mm
Dimension a	110 mm
Dimension b	140 mm
Dimension h	58 mm

Technical data

Number of fixed partitions	1
Number of compartments	2 St.
Mounting system fastening type	Floor
Floor plate	yes
Application area	Screed-covered
Decouplable	no
Trunking width, min.	250 mm
Duct height, min.	58 mm
Usable cross-section	13300 mm ²
Removable cover	yes
Cross-section, draw a	5800 mm ²
Cross-section, draw b	7500 mm ²
Vertical load, large area	to 1,500 N