

# Technical data sheet

Service outlet with hinged cover and locking slider, GES R2, nickel-oxidised  
Item number: 7408849



Service outlet with hinged cover and locking slider for GES R2 floor socket for direct installation in the MT R2 installation socket.

When closed, the floor socket can be wet-cleaned.



|       |                        |
|-------|------------------------|
| Zn    | Die-cast zinc          |
| Ni-Ox | nickel-plated oxidized |

## Master data


|                                    |                          |
|------------------------------------|--------------------------|
| Item number                        | 7408849                  |
| Type                               | GES R2 Ni-O              |
| Description 1                      | Floor socket             |
| Description 2                      | with hinged cover        |
| Manufacturer                       | OBO                      |
| Dimension                          | 140 mm                   |
| Material                           | Die-cast zinc            |
| Surface                            | nickel-plated oxidized   |
| Surface standard                   |                          |
| Smallest sales unit                | 1                        |
| Unit of quantity                   | Piece                    |
| Weight                             | 60.393 kg                |
| Weight unit                        | kg/100 pc.               |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,5213 kg CO2e / 1 Piece |

# Technical data sheet

Service outlet with hinged cover and locking slider, GES  
R2, nickel-oxidised  
Item number: 7408849



## Dimensions

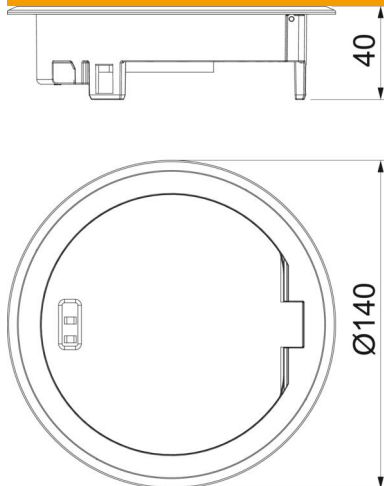

## Technical data

|                                        |                         |
|----------------------------------------|-------------------------|
| Version for                            | Round                   |
| Cable outlet version                   | Swivellable cord outlet |
| Floor covering protection frame        | yes                     |
| Floor care                             | Wet                     |
| Suitable for raised floor installation | yes                     |
| Suitable for cavity floor installation | yes                     |
| Suitable for wet care                  | yes                     |
| Suitable for underfloor ducts          | no                      |
| With floor covering recess             | no                      |
| Standard                               | EN 50085-2-2            |
| Protection rating (IP) when used       | IP20                    |
| Protection rating (IP) when unused     | IP66                    |
| Protection rating IK code              | IK10                    |
| Vertical load, large area              | to 15,000 N             |
| Vertical load, small area              | to 3,000 N              |
| Approvals                              | VDE                     |
| Opening mechanism                      | Locking slider          |