

# Technical data sheet

Trunking unit, blank, locking, height 100–150 mm

Item number: 7424502



Ready-to-mount trunking unit with three self-locking blanking covers for cable laying, consisting of the trunking base (floor trough with side and floor covering guide profiles) and trunking lid. Floor trough with holding shackles for self-contacting mounting of dividers. The scope of supply contains six height-adjustable wall fixing brackets, six screed anchors and three cover joint supports (for nominal trunking widths 200 and 300) or three height-adjustable cover joint supports (for nominal trunking widths 400, 500 and 600). Trunking lid screwed down when delivered.



St

Steel

FS

Strip galvanised

## Master data

|                                                |                                        |
|------------------------------------------------|----------------------------------------|
| Item number                                    | 7424502                                |
| Type                                           | OKA-W30010050R                         |
| Description 1                                  | Flushfloor trunking unit               |
| Description 2                                  | blank, locking                         |
| Manufacturer                                   | OBO                                    |
| Dimension                                      | 2400x300x100                           |
| Material                                       | Steel                                  |
| Surface                                        | Strip galvanised                       |
| Surface standard                               | DIN EN 10346                           |
| Smallest sales unit                            | 2.4                                    |
| Unit of quantity                               | Metre                                  |
| Weight                                         | 1475 kg                                |
| Weight unit                                    | kg/100 m                               |
| CO <sub>2</sub> Footprint (GWP) Cradle-to-Gate | 64,0652 kg CO <sub>2</sub> e / 1 Meter |


# Technical data sheet

Trunking unit, blank, locking, height 100–150 mm

Item number: 7424502



## Dimensions

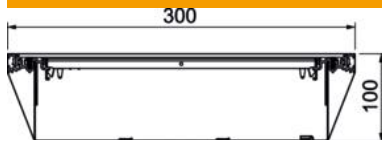

|        |          |
|--------|----------|
| Length | 2,400 mm |
| Width  | 300 mm   |

## Technical data

|                                        |         |
|----------------------------------------|---------|
| Mounting opening cover                 | no      |
| Covers                                 | 3       |
| Number of insertable partitions        | 2       |
| Number of planned flush-mount units    | 3       |
| Number of compartments                 | 3 St.   |
| Mounting system fastening type         | Floor   |
| Floor plate                            | yes     |
| Cover fastening, locking               | yes     |
| Seal installation option               | yes     |
| Installation opening for on-floor tank | no      |
| Decouplable                            | no      |
| Suitable for expansion joint           | no      |
| Mesh wall                              | no      |
| Trunking height, max.                  | 150 mm  |
| Duct height, min.                      | 100 mm  |
| Cover material thickness               | 4       |
| Minimum screed height                  | 100     |
| With connection opening                | no      |
| With equipotential bonding             | no      |
| With separating retainer               | no      |
| With overhang                          | yes     |
| Mounting opening                       | Without |
| Height-adjustment range, max.          | 150 mm  |
| Height-adjustment range, min.          | 100 mm  |
| Removable cover                        | yes     |
| Separating retainer fastening          | stecken |
| Separating retainer fastening          | Plug    |