


# Technical data sheet

## Trunking unit for GES4, height 100–150 mm

Item number: 7424622

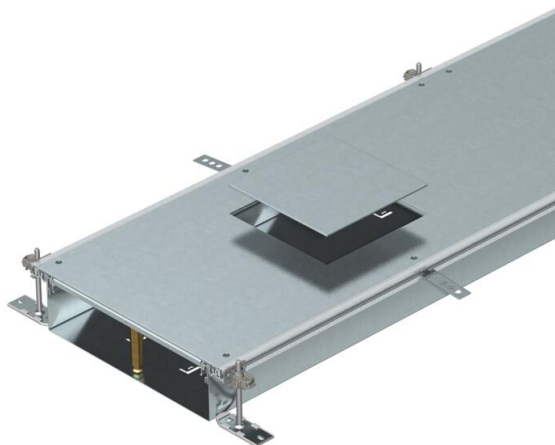

Ready-to-mount trunking unit with three or six device installation lids for cable laying and the installation of flush-mount units of nominal size 4, consisting of the trunking base (floor trough with side and floor covering contact profiles) and trunking lid with blank covered mounting opening. Floor trough with holding straps for self-contacting mounting of separating retainers. The scope of delivery contains 6 height-adjustable fixing brackets, 6 screed anchors and lid butt seals (3x for nominal trunking widths of 200 and 300) or height-adjustable lid butt supports: 3x for nominal trunking width 400 and 6x for nominal trunking widths 500 and 600. Trunking lid screwed down when delivered. With screw-on device installation lids, each with an installation opening for an installation unit nominal size 4.



**St** Steel

**FS** Strip galvanised

### Master data

|                                                |                                        |
|------------------------------------------------|----------------------------------------|
| Item number                                    | 7424622                                |
| Type                                           | OKA-W40010050D4                        |
| Description 1                                  | Flushfloor trunking unit               |
| Description 2                                  | for service unit GES19                 |
| Manufacturer                                   | OBO                                    |
| Dimension                                      | 2400x400x100                           |
| Material                                       | Steel                                  |
| Surface                                        | Strip galvanised                       |
| Surface standard                               | DIN EN 10346                           |
| Smallest sales unit                            | 2.4                                    |
| Unit of quantity                               | Metre                                  |
| Weight                                         | 1847.9 kg                              |
| Weight unit                                    | kg/100 m                               |
| CO <sub>2</sub> Footprint (GWP) Cradle-to-Gate | 79,1946 kg CO <sub>2</sub> e / 1 Meter |

### Dimensions



|        |          |
|--------|----------|
| Length | 2,400 mm |
| Width  | 400 mm   |

# Technical data sheet

Trunking unit for GES4, height 100–150 mm

Item number: 7424622



## Technical data

|                                            |                    |
|--------------------------------------------|--------------------|
| Mounting opening cover                     | yes                |
| Covers                                     | 3                  |
| Number of insertable partitions            | 2                  |
| Number of planned flush-mount units        | 3                  |
| Number of compartments                     | 3 St.              |
| Mounting system fastening type             | Floor              |
| Floor plate                                | yes                |
| Cover fastening, locking                   | no                 |
| Seal installation option                   | yes                |
| Installation opening for on-floor tank     | no                 |
| Decouplable                                | no                 |
| Suitable for expansion joint               | no                 |
| Mesh wall                                  | no                 |
| Trunking height, max.                      | 150 mm             |
| Duct height, min.                          | 100 mm             |
| Cover material thickness                   | 4                  |
| Minimum screed height                      | 100                |
| With connection opening                    | yes                |
| With equipotential bonding                 | no                 |
| With separating retainer                   | no                 |
| With overhang                              | yes                |
| Mounting opening                           | For service outlet |
| Mounting opening                           | Square             |
| Nominal size for device installation units | 4                  |
| Height-adjustment range, max.              | 150 mm             |
| Height-adjustment range, min.              | 100 mm             |
| Removable cover                            | yes                |
| ROHS-conformant                            | yes                |
| Separating retainer fastening              | stecken            |
| Separating retainer fastening              | Plug               |